

Multiplied Force FUSE

Technical File
T 03519 D

with eutectic alloy

FUD3030 . . . - FUD3031 . . .

Description - General information


Thermal Trigger powered by intrinsic energy (spring) using an eutectic alloy fuse 25mm in length.

Ref. : FUD3030 . . .

Also available with wire thimble for cable, Ref. : FUD3031 . . .

These products have a test report according to appendix B of norm NFS 61-937.

Temperatures in stock : 70 and 91°C, different temperatures concerning the fuses available.

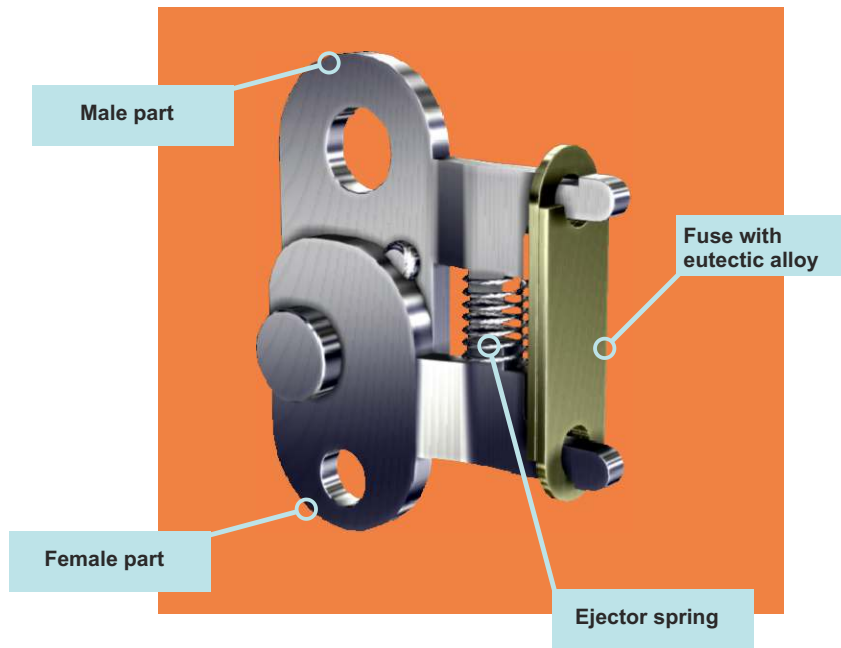


Replacing the fuse



Technical Characteristics

Material : Steel -brass - tin.
Protection : Zinc coating.
Traction force : Max. 300daN.
Triggering temperatures : 70 and 91°C (-5°C +30°C)
Precautions : Stock and install away from bad weather conditions.

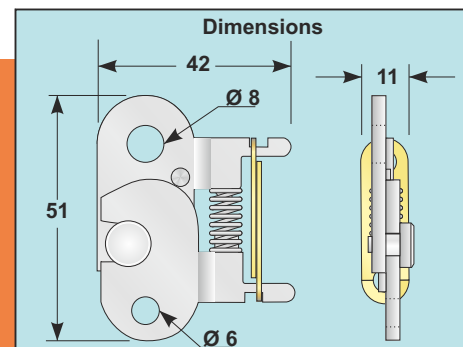

DUPUY EQUIPEMENTS
Les Ajeux - 72400 La Ferté Bernard - France
Tel. : +33 (0)2 43 60 78 60 - Fax : +33 (0)2 43 93 41 94
e-mail : clients@de72.fr



www.dupuy-equipements.com

